

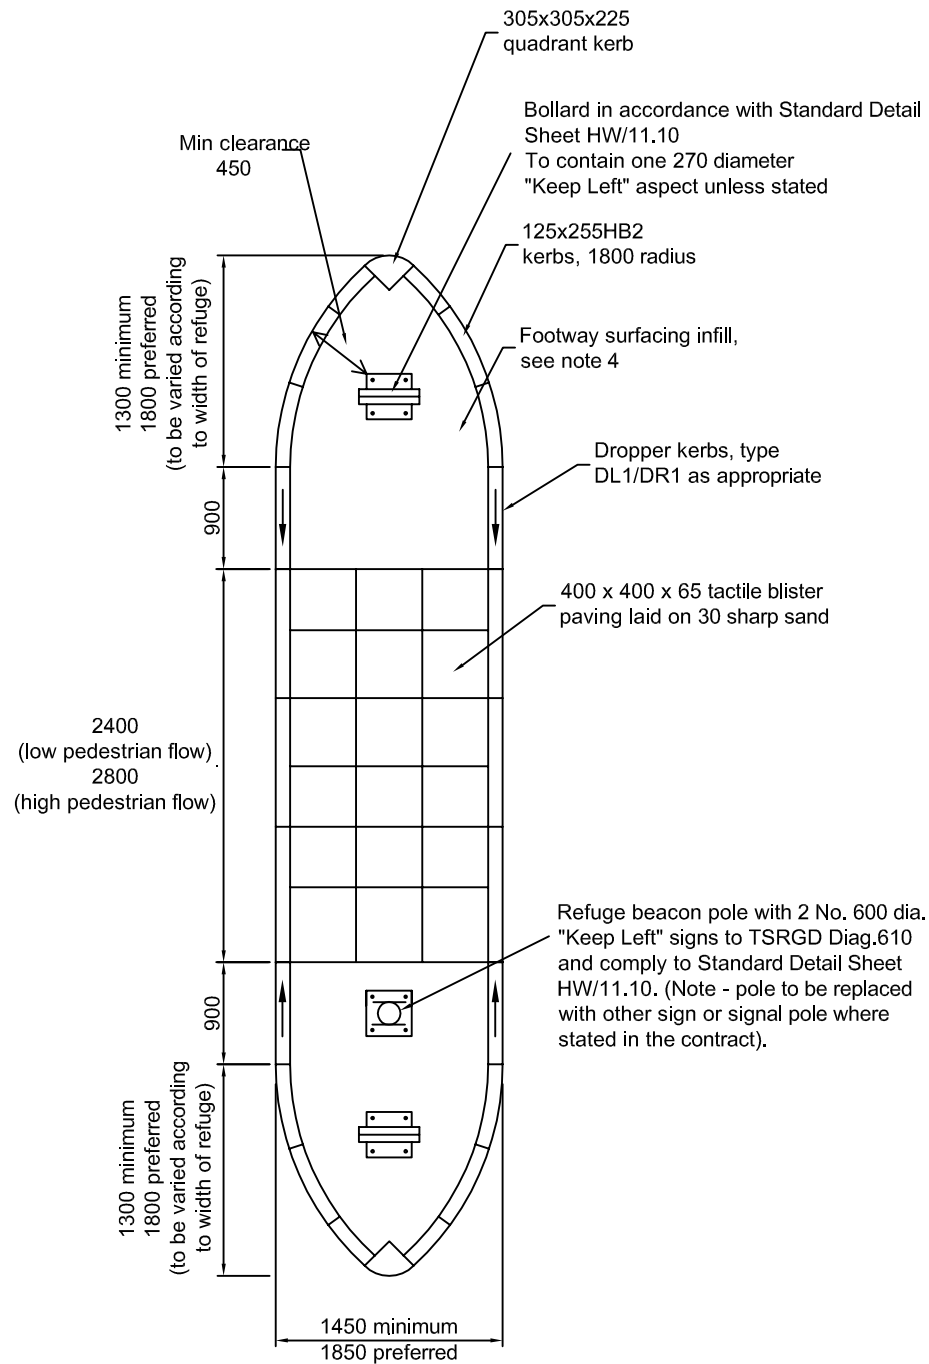


FILE PATH - X:\ACAD\dwg\lcs\Standard Detail Drawings\Current\Series 1100\dwg\HW-11.09 RevK Central Island (Types 3 and 4).dwg



CENTRAL ISLAND
TYPE 3

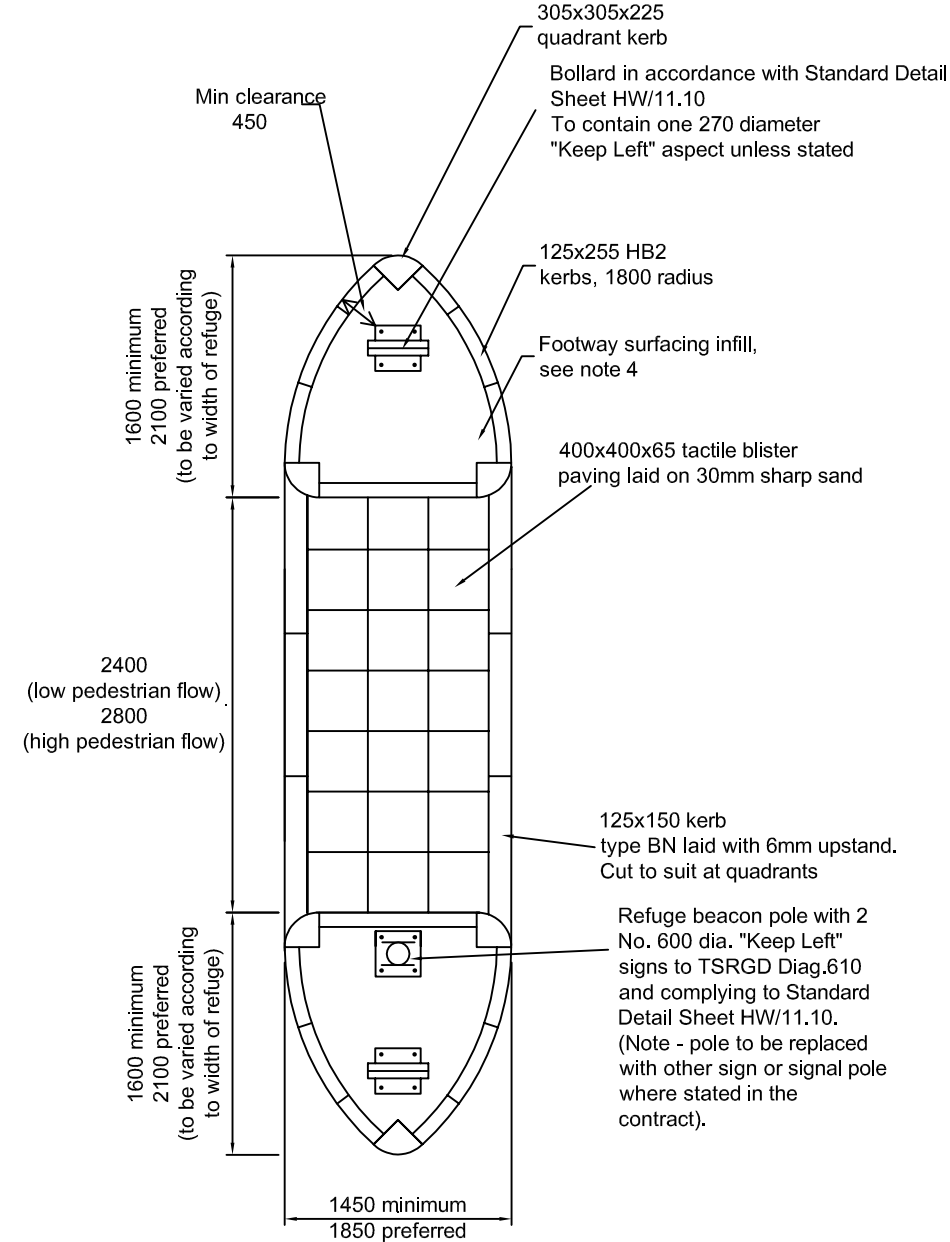

CENTRAL ISLAND
TYPE 4

Notes :-

1. Kerbs to be to BS EN 1340.
2. Kerbs to be laid on ST4 concrete bed and backing.
3. All dimensions in mm.
4. Footway surfacing infill to consist of ST4 concrete with brushed finish.
5. Tactile paving surfaces to be in accordance with "Guidance on the Use of Tactile Paving", DfT 1999 (Figure 10 or 11 as appropriate.)
6. Tactile paving colour to be red at controlled crossings and buff at uncontrolled crossings.
7. Bullnose kerbs to have maximum upstand.
8. Width of refuge may be varied between minimum and preferred dimensions where necessary. Lengths of bollard islands should also be varied.
9. This drawing should be read in conjunction with Standard Detail Sheets HW/11.01 - HW/11.06 and HW/11.55.
10. Where pole is omitted, internally illuminated bollards to standard detail HW/12.02 are to be used unless stated by the Project Manager.



This detail is controlled by Birmingham City Council. Email - Transport.Projects@Birmingham.gov.uk

SCHEME

STANDARD DETAIL SHEETS

DRAWING

CENTRAL ISLAND
(TYPES 3 & 4)

2015	K	DETAILS AMENDED	DH	TE
2013	J	DETAILS & FRAME AMENDED	DH	PP
2009	I	NOTES AMENDED	CCH	MM
2008	H	NOTES AMENDED	CCH	BSF
2007	G	DETAILS & NOTES AMENDED	-	JN
2007	F	NOTES AMENDED	-	BSF
2007	E	DETAILS & NOTES AMENDED	-	BSF
2004	D	NOTES AMENDED	-	AJC
2003	C	NOTES AMENDED	-	BSK
2002	B	BORDER & TITLE AMENDED	-	AJC
2002	A	NOTES AMENDED	-	AJC
2000	-	ORIGINAL DRAWING CREATED	SRE	AJC
DATE	REV.	REVISIONS		DRN
DRAWN	DESIGNER	PM	REVISION	
DH 03/12/13	TE 03/12/13	PP 03/12/13	K	
DRAWING STATUS				SCALE
GENERAL				NTS
DWG. No				
HW/11.09				