



A3

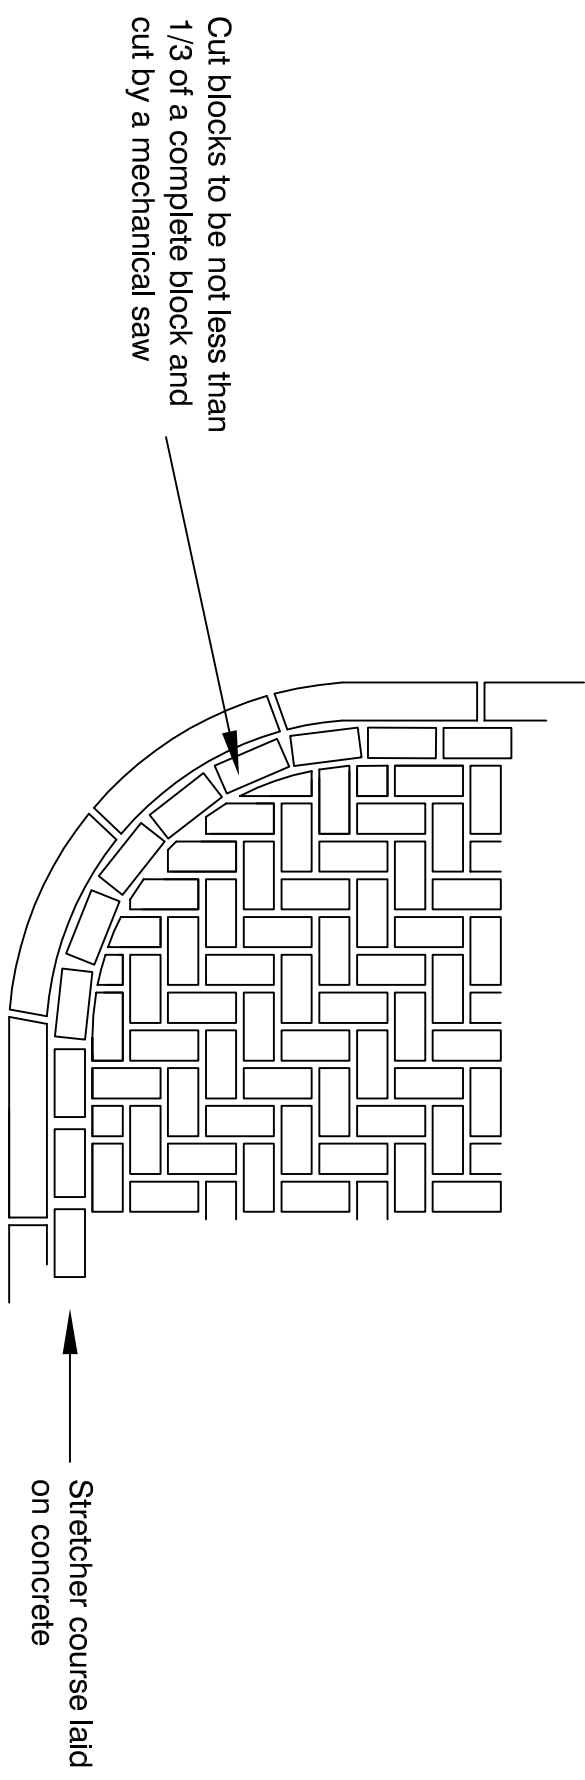

90° HERRINGBONE DETAIL

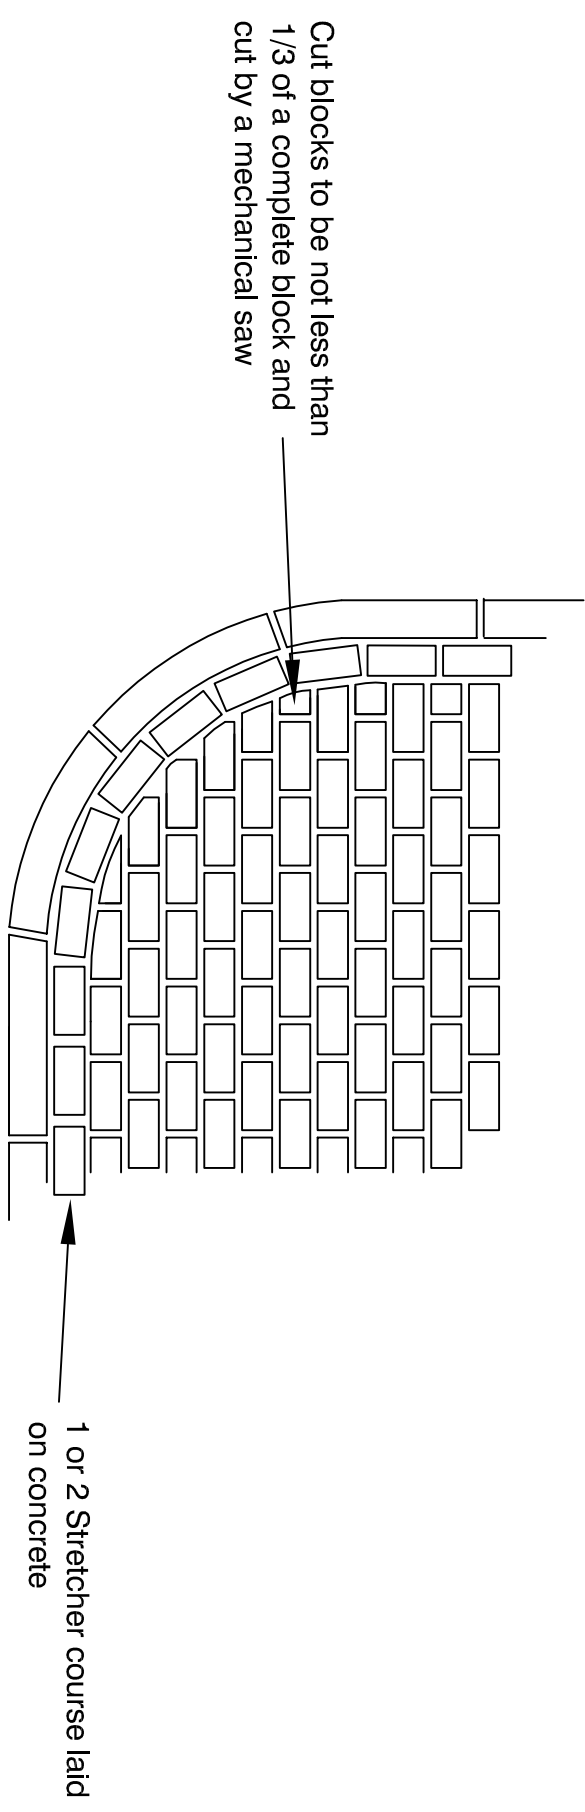

STRETCHER DETAIL

**Notes :-**

1. Blocks to be laid on 30mm thick compacted sharp sand overlaying 100mm thick Granular Type 1 sub-base.
2. Laying sand to be in accordance with BS 7533-3:2005+A1, grading category 3.
3. Joint infill shall be kiln-dried fine clean sand grading FP to BS EN 12620 +A1, designation 0/1 with 55-100% by mass passing the 0.5mm sieve, the addition of 5% ordinary portland cement .
4. For colour of block / brick refer to contract document.



STANDARD DETAIL SHEETS



METHOD OF BLOCK/BRICK LAYING TO AVOID SMALL INFILL UNITS

This detail is controlled by Birmingham City Council. Email - Transport.Projects@Birmingham.gov.uk

DATE	REV.	DESCRIPTION	BY	CHECKED
2013	F	DETAILS & FRAME AMENDED	DH	PP
2009	E	NOTES AMENDED	CCH	MM
2005	D	NOTES AMENDED	-	AJC
2004	C	NOTES AMENDED	-	AJC
2003	B	NOTES AMENDED	-	BSK
2002	A	DETAILS & NOTES AMENDED	-	AJC
2000	-	ORIGINAL DRAWING CREATED	MP	AJC

DATE	DESIGNER	PM	PP	SCALE
DRAWN	12/12/13	TE	12/12/13	PP
DH	12/12/13	TE	12/12/13	PP
DRWG. No	HW/11.51			DRWG. No
DRAWING STATUS	GENERAL			SCALE
GENERAL	NTS			SCALE